



Submittal Data

Submittal Data Model : **MSAG11C-18HRDN1-MS0W/MOX330-18HFN1-MS0W**

Description:

Job Name:

Location:

Date:

Purchaser:

Engineer:

Submitted to:

For:

Review:

Approval:



SYSTEM PERFORMANCE DATA		
Power supply		
Normal Operational Voltage (V, Ph, Hz)		208/230, 1, 60
Voltage Range (V)		187-253
Electrical		
Minimum circuit ampacity (A)		15
Max.fuse (A)		20
Connection wiring		14*4 AWG
Cooling		
Rated Capacity (Btu/h)		18000
Capacity Range (Btu/h)		3900~20000
Power Input (Max) (W)		1638
Rated current (A)		7.5
SEER (Btu/W)		19.5
EER (Btu/W)		11
Heating at 47F		
Rated Capacity (Btu/h)		18800
Capacity Range (Btu/h)		6300~19400
Power Input (Max) (W)		1806
Rated current (A)		8.01
HSPF4 (Btu/W)		10
HSPF5 (Btu/W)		8.5
COP W/W		3.05
Heating at 17F		
Max Capacity (Btu/h)		12500

INDOOR UNIT DATA		
Indoor fan motor		
Type		Cross-Flow
Model		ZKFP-30-8-3-10
Qty		1
Input (W)		36.0
RLA (A)		-
LRA (A)		---
Winding Resistance (Ω)		---
Capacitor (uF)		---
Speed(Hi/Mi/Lo) (r/min)		1200/1000/700
Air flow & Noise level		
Indoor air flow (Hi/Med/Lo) (CFM)		458.82/329.41/270.59
Indoor noise level (Hi/Med) [dB(A)]		45/38/30.0
Dehumidification (Pint/H)		---
Indoor unit		
Dimension (WxDxH) (inch)		38.23x8.98x12.64
	(mm)	971x228x321
Packing(WxDxH) (inch)		41.14x12.01x15.94
	(mm)	1045x305x405
Net/Gross weight (lbs.)		24.47/31.75
	(kg)	11.1/14.4

REFRIGERANT PIPE DATA		
Design pressure (PSIG)		550/340
Refrigerant Type (Oz)		R410A/47.6
Refrigerant precharge (ft)		25.0
	(m)	7.6
Additional charge for each (oz/ft)		0.16
	(g/ft)	15
Liquid side/ Gas side (inch)		1/4" / 1/2"
	(mm)	φ6.35 / φ12.7
Max. pipe length (ft)		98.0
	(m)	30
Max. difference in level (ft)		66.0
	(m)	20
Connection method		(Flared)
Indoor(cooling/ heating) (Deg. °F)		60~90 / 32~86
	(Deg. °C)	16~32 / 0~30
Outdoor(cooling/heating) (Deg. °F)		5~122 / 5~75
	(Deg. °C)	-15~50 / -15~24
Application area (sq.ft)		258.33~376.74
	(m2)	24~35

OUTDOOR UNIT DATA		
Compressor		
Type		KSN140D21UFZ
Model		ROTARY
Brand		GMCC
Capacity (Btu/h)		14962.24106
Input (W)		1140
Rated current (RLA) (A)		-
Refrigerant oil/oil charge (ml)		-
Throttle		Capillary
Outdoor fan motor		
Model		ZKFN-34-10-1-3
Qty		1
Input (W)		--
RLA (A)		--
Speed (r/min)		950/800/650/450
Air flow & Noise level		
Outdoor air flow (Max.) (CFM)		1235.29
Outdoor noise level [dB(A)]		57.00
Outdoor unit		
Dimension (WxDxH) (inch)		31.69x12.99x21.81
	(mm)	805x330x554
Packing (WxDxH) (inch)		36.02x14.57x24.21
	(mm)	915x370x615
Net/ Gross weight (lbs.)		73.85/79.81
	(kg)	33.5/36.2

COMPATIBILITY:

SINGLE ZONE INDOOR SYSTEM:


MODEL NO. **MSAG11C-18HRDN1-MS0W**

SINGLE ZONE OUTDOOR SYSTEM:

MODEL NO. **MOX330-18HFN1-MS0W**

SPECIFICATIONS:


Accessories	Line sets – insulated and flared.	TCP12/18L15 TCP 12/18L25 TCP12/18L50
Outdoor	Wall bracket	OWMB09-30K
Outdoor	Riser support	SD01B
Safety Certifications		UL
Warranty		2 YEARS PARTS, 6 YEARS COMPRESSOR

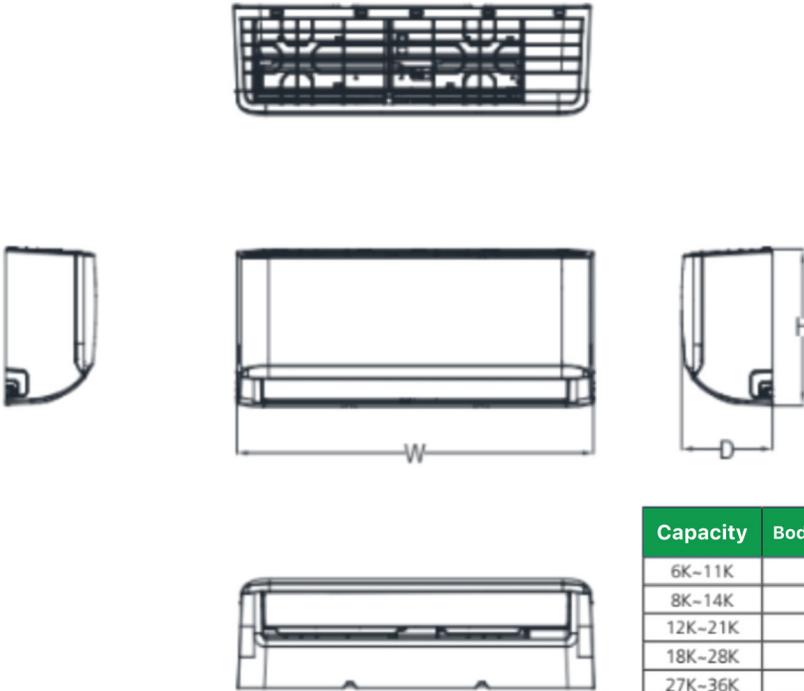

Capacity	Body Code	W (mm/inch)	D (mm/inch)	H (mm/inch)
6K-11K	A	729/28.7	200/7.87	292/11.5
8K-14K	B	802/31.57	200/7.87	295/11.61
12K-21K	C	971/38.23	228/8.98	321/12.64
18K-28K	D	1082/42.6	234/9.21	337/13.27
27K-36K	F	1259/49.57	283/11.14	362/14.25

GENERAL FEATURES:

- * Ultra-Quiet Operation
- * Random swing, airflow direction control
- * Self-Diagnostics, LCD display
- * Auto restart operation
- * Remote control include
- * Dehumidifier mode
- * Refrigerant leakage detect
- * Local service parts stock in BC, Canada

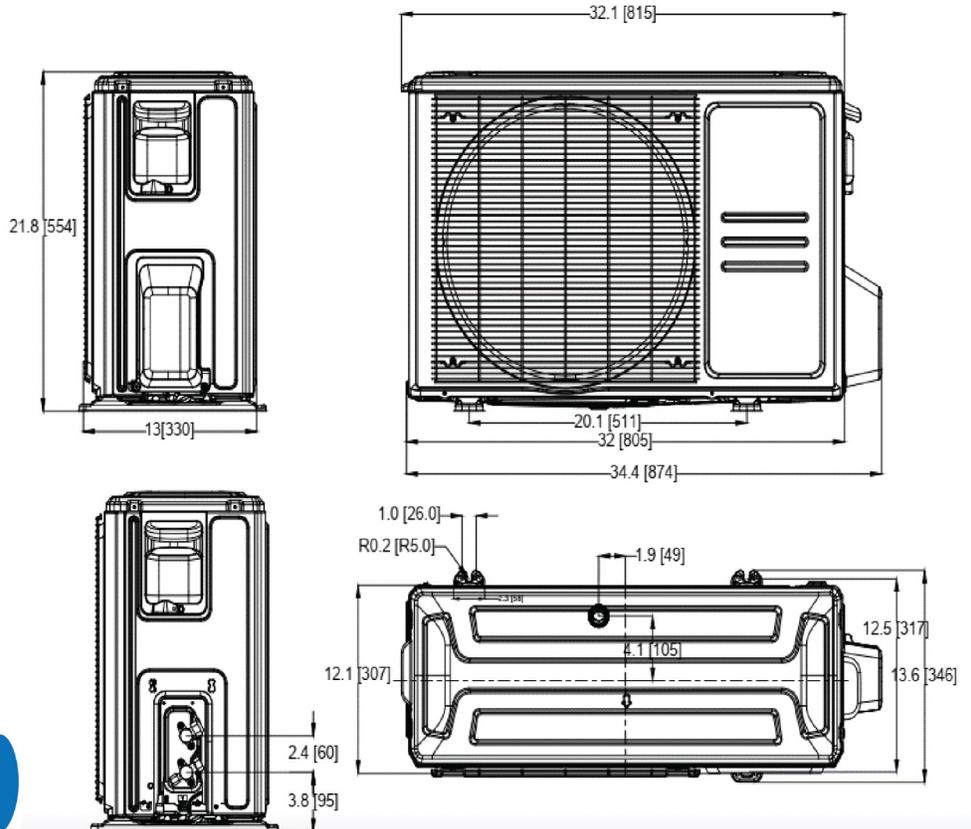

ARHI No.208121847