

INFINI Split

- 46°F Heating
- Longer Airflow
- Louver Position Memory Function
- Smart Control
- Gear Function (optional)

Standard Features



ECO



Turbo



Sleep Mode



Timer



Follow me



Self clean



46° F heating



Silent Mode



Horizontal Swing



Gear



LED



1%-100% Fan Speed Setting



Breeze Away



Child Lock



°C and °F Change

Optional Features



Wired Control



Wi-fi Control

OUTSTANDING FEATURES


INFINI

Stepless Frequency Adjustment

Precise control maintains stable and constant room temperature while reducing sound level and energy consumption.

Follow Me

Built-in temperature sensor in the Remote Controller will sense its surrounding temperature and adjust the room temperature more accurately to provide greater comfort.

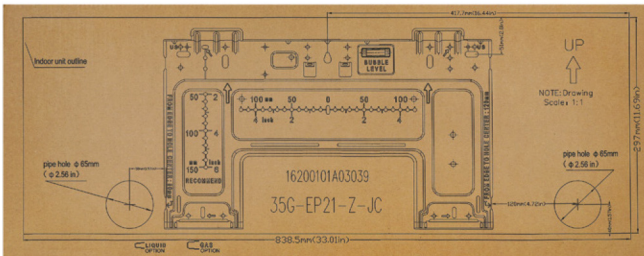


Mounting Template

Printed cardboard mounting template is convenient for single-person installation.

46°F Heating

In heating operation, the preset temperature of the air conditioner can be as low as 46°F, which keeps the room temperature steady at 46°F and prevents the house from freezing when it is unoccupied for a long time in severe cold weather.

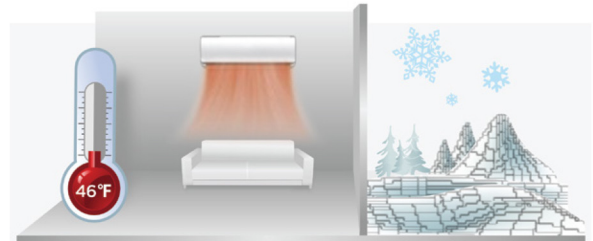

High Density Filters

Compared with ordinary dust filters, the high density filter can increase the dust capture rate by up to 50% and pollen by up to 80%.



Controls



Wireless Remote Controller included with indoor unit



Optional Wifi-Kit



Optional Wired Controller

INFINI

Model	Indoor Unit Outdoor Unit		MSAG11A-09HRFN1-BS5W MOX230-09HFN1-BS5W	MSAG11B-12HRFN1-BS0W MOX230-12HFN1-BS8W
Performance				
Power Supply		V, Ph, Hz	115, 1, 60	115, 1, 60
SEER2 (AHRI 210/240 - 2023)	Cooling /Heating Capacity	Btu/h	9000/10000	12000/12000
	SEER2	Btu/W	21.5	20.8
	EER2	Btu/W	12.5	10.3
	HSPF4	Btu/W	9.1	8.7
Heating at 5°F(-15°C)	Rated capacity	Btu/h	7000	6300
	COP	W/W	2.16	1.78
Indoor unit				
Air Flow Volume	H/M/L	CFM	238.82/170.00/137.06	300.00/241.18/176.47
Noise Level	H/M/L	dB(A)	37.5/28/20	41/35/26.5
Net Dimension	WxDxH	mm	729x200x292	802x200x295
	WxDxH	inch	28.70x7.87x11.50	31.57x7.87x11.61
Packing Dimension	WxDxH	mm	790x270x375	875x285x380
	WxDxH	inch	31.10x10.63x14.76	34.45x11.22x14.96
Net/Gross Weight		kg	8.0/10.3	8.4/10.9
		lbs	17.64/22.71	18.52/24.03
Outdoor unit				
Noise Level	H/M/L	dB(A)	55	54
Net Dimension	WxDxH	mm	765x303x555	765x303x555
	WxDxH	inch	30.12x11.93x21.85	30.12x11.93x21.85
Packing Dimension	WxDxH	mm	887x337x610	887x337x610
	WxDxH	inch	34.92x13.27x24.02	34.92x13.27x24.02
Net/Gross Weight		kg	26.2/28.8	28.2/30.7
		lbs	57.76/63.49	62.17/67.68



MSAG11C-18HRDN1-MSOW MOX330-18HFNI-MSOW	MSAG11D-24HRFNI-MROW MOX430-24HFNI-MROW	MSAGF-30HRFNI-MTOW MOD30-30HFNI-MSOW	MSAGF-30HRFNI-MTOW MOD30U-30HFNI-M(GA)	MSAGF-36HRFNX-MROW MOD31-36HFNI-MPOW
208/230, 1, 60	208/230, 1, 60	208/230, 1, 60	208/230, 1, 60	208/230, 1, 60
18000/18800	24000/24000	30000/30000	30000/30000	36000/36000
19.5	18.5	21	21	18
11	9.5	12.2	12.2	9.5
8.7	8.6	8.2	8.7	7.8
11700	14800	18400	20000	22000
2.06	1.83	1.86	1.85	2.01
458.82/329.41/270.59	546.47/402.35/330.59	701.76/535.88/380.00	701.76/535.88/380.00	652.94/447.06/329.41
45/38/30.0	45/39.5/36	49.5/43.5/39.5	50.5/45.5/39.5	54/45/40
971x228x321	1082x234x337	1259x283x362	1259x283x362	1259x283x362
38.23x8.98x12.64	42.60x9.21x13.27	49.57x11.14x14.25	49.57x11.14x14.25	49.57x11.14x14.25
1045x305x405	1155x415x315	1340x450x385	1340x450x385	1340x450x385
41.14x12.01x15.94	45.47x16.34x12.40	52.76x17.72x15.16	52.76x17.72x15.16	52.76x17.72x15.16
11.1/14.4	13.6/17.3	19.5/25.2	19.5/25.2	19.4/25.2
24.47/31.75	29.98/38.14	42.99/55.56	42.99/55.56	42.77/55.56
57	60	61.5	63	61.5
805x330x554	890x342x673	946x410x810	946x410x810	946x410x810
31.69x12.99x21.81	35.04x13.46x26.50	37.24x16.14x31.89	37.24x16.14x31.89	37.24x16.14x31.89
915x370x615	995x398x740	1090x500x885	1090x500x885	1090x500x885
36.02x14.57x24.21	39.17x15.67x29.13	42.91x19.69x34.84	42.91x19.69x34.84	42.91x19.69x34.84
33.5/36.2	13.6/17.3	64.3/68.9	64.8/69.2	68.1/72.1
73.85/79.81	29.98/38.14	141.76/151.90	142.86/152.56	150.13/158.95

